

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1293.1131/MDS

First Named Inventor or Application Identifier:

In-sik PARK

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 40]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 12]
4. ☐ Oath or Declaration [Total Pages:]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: / **18. CORRESPONDENCE ADDRESS**

21171

PATENT TRADEMARK OFFICE

Staas & Halsey

TITLE OF THE INVENTION

OPTICAL RECORDING MEDIUM HAVING READ-ONLY STORAGE AREA AND WRITEABLE STORAGE AREA AND RECORDING/REPRODUCING APPARATUS AND METHOD THEREFOR

5 CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application 60/214,734, filed June 29, 2000, in the U.S. Patent & Trademark Office, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 1. Field of the Invention

15 The present invention relates to a recording medium having a read-only storage area and a writable storage area and a recording/reproducing apparatus and method therefor, and more particularly, to a recording medium having a read-only storage area complying with a digital versatile disc (DVD) specification and a writable storage area physically compatible with a DVD-writable specification and a recording/reproducing apparatus therefor.

2. Description of the Related Art

20 Generally, read-only optical recording media that are manufactured by injection molding have characteristics in that information is configured in the form of embossments referred to as pits so that user information is recorded on a mold, and the information is transferred during injection. Accordingly, read-only optical recording media are advantageous in increasing production efficiency compared to the case where information is recorded on a floppy disc or a magnetic recording medium and distributed.

25 However, read-only optical recording media on which users cannot record data have a problem in that data cannot be modified or added in application examples such as an encyclopedia and popular music data for accompaniment which frequently require modification of data and addition of data.

30 Meanwhile, among digital versatile disc specifications, read-only discs are defined in a digital versatile disc read only memory (DVD-ROM) specification (DVD Specification for read-only memory Part 1 version 1.0). Discs on which a user can record data are defined in a digital versatile disc random access memory (DVD-RAM) specification (DVD Specification for

rewritable memory Part 1), in a digital versatile disc recordable memory (DVD-R) specification (DVD Specification for recordable memory Part 1), and in a digital versatile disc rewritable memory (DVD-RW) specification (DVD Specification for re-recordable memory Part 1).

5 However, discs having both a read-only specification and a recordable specification are not defined so that requirements for modification of data and addition of data, which are characteristics of a recordable disc, and requirements for mass copying of the same data, which is a characteristic of a read-only disc, cannot be simultaneously satisfied.

10 When proposing a new optical disc satisfying the above requirements, compatibility with a recording/reproducing apparatus according to a conventional specification should be considered. In other words, it is important to make a new optical disc satisfying the above requirements to be compatible with a conventional recording/reproducing apparatus which is made and performs, without consideration of a medium having the characteristics of both a recordable disc and a read-only disc.

15 In this case, it is apparent that complete compatibility cannot be achieved because the characteristic of a particular area on a single disc changes. Accordingly, as for compatibility, the characteristics of a read-only medium are primarily considered such that data in a read-only storage area can be reproduced in a conventional apparatus for only reproducing, and simultaneously, a writable storage area is considered to be compatible with physical
20 recording/reproducing characteristics defined in a conventional rewritable specification taking into account the fact that data can be additionally recorded or updated in the writable storage area while a user is using a disc.

25 In addition, it is preferable that an optical recording medium having a read-only storage area and a writable storage area has drive compatibility with a conventional DVD-ROM drive and a conventional DVD-RAM drive.

For a clear understanding of the present invention, a structure of an optical disc (optical recording medium) defined according to a digital versatile disc read only memory (DVD-ROM) specification will be described in detail. FIG. 1 is a sectional view of a conventional

dual layer optical disc 10 defined according to the DVD-ROM specification. The optical disc 10 defined according to the DVD-ROM specification comprises first and second substrates 12, 14. Information layers 16, 18 are formed on the first and second substrates 12, 14, respectively, and the first and second substrates 12, 14 are united such that the information layers 16, 18 face each other. The information layer (16 in this instance) nearer to a substrate on which a read laser beam is incident is defined as a first recording layer, and the underlying information layer (18 in this instance) is defined as a second recording layer.

Such an optical disc 10 includes a lead-in area (not show) at an innermost part of the optical disc 10 and a lead-out area (not shown) at an outermost part of the optical disc 10, or a middle area in which various control information (not shown) and information on the physical characteristics of the optical disc 10 is recorded, so that data in the inner part and the outer part can be steadily read.

Generally, a read-only optical disc is molded by injecting a polycarbonate resin material into a die, referred to as a stamper, on which information is formed in the form of embossed pits, such that the information can be transferred to the read-only disc. After forming the read-only optical disc by injection, a material such as aluminum having a characteristic of reflecting light is sputtered on an information surface to form a reflective layer.

A DVD-ROM (the optical disc 10) is formed by uniting two discs (the first and second substrates 12, 14), each of which is molded according to the above method to have a thickness of 0.6 mm, so as to have a total DVD-ROM thickness of 1.2 mm. One substrate may not have a recording layer, or each substrate may have two recording layers. In the case where each of first and second substrates 12, 14 has a single recording layer, when the optical disc is formed such that data can be read from only one side of the optical disc, the optical disc is referred to as a dual layer optical disc. When a disc is formed such that data can be read from layers on both sides of the optical disc 10, the optical disc 10 is referred to as a double sided disc.

As described above, since information is recorded on a read-only optical disc while it is being formed by injecting a polycarbonate resin material into a stamper on which information is formed, the information can be formed on the read-only optical disc in a short time as

compared to a magnetic recording medium or a writable recording medium. Accordingly, the read-only optical disc is suitable for mass producing the same data, such as a film or a computer game which needs to be copied in large quantity.

FIG. 2 is a diagram showing a structure of a conventional optical disc recording medium 20 having two data storage areas having different characteristics. Data which can be reproduced using a laser of 780 nm is recorded in a first recording area 26 on the optical disc 20, and data which can be reproduced using a laser of 635-650 nm is recorded in a second recording area 27. Referenced numeral 22 denotes a standard density information layer for a compact disc (CD), reference numeral 23 denotes a high-density information layer for a DVD, reference numeral 24 denotes a second substrate layer, reference numeral 25 denotes a first substrate layer, reference numeral 26 denotes the first recording area which is readable using the laser of 780 nm, and reference numeral 27 denotes the second recording area which is readable using the laser of 635-650 nm. The dual layer high-density optical disc 20 of FIG. 2 is disclosed in U.S. Patent No. 5,732,065, entitled "Optical Information Carrier Including Standard and High Density Layers," and filed on Sep. 4, 1996.

FIG. 3 shows a structure of a complex recording layer 32 of a typical writable, optical recording medium 30. Since user data is not recorded on a disc during manufacturing of a writable medium such as a digital versatile disc random access memory (DVD-RAM), substrates can be formed using the same stampers. Unlike a read-only medium in which a reflective layer is simply formed, a complex recording layer including a plurality of films (i.e., a dielectric layer 34, a recording layer 36, another dielectric layer 38 and a reflective layer 40 shown in FIG. 3) needs to be formed on a substrate 42 to allow a user to record data on the optical recording medium 30. A DVD-RAM or a digital versatile disc-rewritable (DVD-RW) has a complex recording layer having a multi-layered structure such that recording can be achieved using a change in a material of the recording layer 36, that is, a change between an amorphous state and a crystalline state.

SUMMARY OF THE INVENTION

To solve the above and other problems, a first object of the present invention is to provide an optical recording medium that is compatible with a digital versatile disc (DVD) specification and also has a read-only storage area and a writable storage area.

5 A second object of the present invention is to provide an optical recording medium which has a read-only storage area and a writable storage area, and on which control information for the writable storage area is recorded in the read-only storage area so that the optical recording medium can be compatible with a DVD specification.

10 A third object of the present invention is to provide a recording/reproducing apparatus for an optical recording medium that is compatible with a DVD specification and also has a read-only storage area and a writable storage area.

In order to achieve at least the first and second objects, the present invention provides an optical recording medium comprising a substrate; a read-only storage area at an inner part of the substrate; and a writable storage area at an outer part of the substrate.

15 To achieve at least the third object of the present invention, there is provided an apparatus for recording/reproducing data onto/from an optical recording medium having a read-only storage area at an inner part of a substrate and a writable storage area at an outer part of the substrate, the apparatus comprising a system controller which generates identification information for indicating that the optical recording medium is a hybrid disc having the read-only storage area and the writable storage area; and a recording unit which records the data of the read-only storage area, which is updated for use by correction, modification and addition, in the writable storage area, and the generated identification information in the lead-in area of the read-only storage area.

20 Preferably, the recording/reproducing apparatus further comprises a reproducing unit which reproduces data from the optical recording medium by controlling a reference linear velocity for reproduction at the read-only storage area to be the same as a reference linear velocity at the innermost part of the writable storage area.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and advantages of the present invention will become more apparent by describing in detail preferred embodiments thereof with reference to the attached drawings in which:

5 FIG. 1 is a sectional view of an optical recording medium compatible with a conventional digital versatile disc read only memory (DVD-ROM) specification;

 FIG. 2 is a diagram showing a structure of a conventional optical recording having two kinds of data storage areas having different characteristics;

10 FIG. 3 is a diagram showing a structure of a conventional recording layer of a writable optical recording medium, which provides for a clear understanding of the present invention;

 FIGS. 4 through 9 are examples of structures of embodiments of an optical recording medium having a read-only storage area and a writable storage area according to the present invention;

15 FIG. 10 is a diagram showing a control information format in a lead-in area on an optical recording medium according to the present invention;

 FIG. 11 is a diagram showing a structure of hybrid disc identification information of the control information shown in FIG. 10;

20 FIGS. 12A and 12B are diagrams showing an information structure of a lead-in area on an optical recording medium having a writable specification and an information structure of a lead-in area on an optical recording medium having a read-only specification, respectively, for clear understanding of the present invention; and

 FIG. 13 is a block diagram of a recording/reproducing apparatus using an optical recording medium according to embodiments of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Reference will now made in detail to the present preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like

reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

When an optical recording medium (hereinafter, referred to as a hybrid disc) having both a read-only storage area and a writable storage area, which are defined in a DVD specification, is defined under the situation that conventionally, individual DVD specifications for a read-only medium and a writable medium exist, compatibility of the specification for the hybrid disc with the conventional specifications becomes a problem as described before. The term "writable" may indicate "recordable" for a DVD-R, "rewritable" for a DVD-RAM and "re-recordable" for a DVD-RW.

A recording medium having a ROM and a RAM area is mainly used for supplying the same content in bulk by taking advantage of easy duplication, which is the characteristic of a read-only medium. Accordingly, the read-only storage area needs to be primarily considered in solving a compatibility problem.

In addition, since a physical space on a disc is divided such that a specific space is assigned as a read-only storage area, and another specific space is assigned as a writable storage area, the physical characteristics of a space on a hybrid disc are different from those of a space on a disc having only one kind of storage area. Accordingly, it is apparent that the specification for the hybrid disc cannot be completely compatible with conventional specifications.

In this specification, as for the compatibility, it is preferable that the read-only storage area has a compatibility such that data in the read-only storage area can be reproduced in a conventional reproducing apparatus, and a writable storage area is compatible with the recording/reproducing characteristics of a conventional writable medium such that additional circuits necessary for implementing a recording/reproducing apparatus for recording, modifying or reproducing data on the writable storage area can be minimized. By doing this, user data stored in the read-only storage area can be reproduced in a conventional reproducing apparatus at least so that the hybrid disc can be used for the same usage as that of a conventional DVD-ROM. In addition, a recording/reproducing apparatus for the hybrid disc

according to the present invention can modify data stored in the read-only storage area or add new data to the data stored in the read-only storage area, thereby securing compatibility of the hybrid disc with a conventional DVD reproducing apparatus.

A first embodiment which considers the requirements for such compatibility is shown in FIG. 4. In this diagram, a portion of a hybrid disc 40 is shown, wherein a data area 42, in which user data can be prerecorded according to a conventional DVD-ROM specification, has a start diameter of 48 mm indicating the beginning of the data area and a maximum diameter of 116 mm (in the case of a disc having a diameter of 120 mm) or 76 mm (in the case of a disc having a diameter of 80 mm). In other words, the start diameter is predetermined, but the end diameter of the data area is not fixed to a certain value. A range is given for the end diameter.

Accordingly, the start diameter of the data area is set to 48 mm, and the end diameter of the data area is set to be larger than 48 mm and smaller than 116 mm in the case of an optical disc having a diameter of 120 mm (or 76 mm in the case of an optical disc having a diameter of 80 mm), and a writable storage area is defined in the remaining area other than an information area for recording control information among the area in which read-only data is not recorded, thereby obtaining optimal compatibility with a conventional DVD-ROM.

When considering the fact that a recording area is divided into a plurality of zones using a zoned continuous linear velocity (ZCLV) method in a DVD-RAM, it is preferable to assign at least an area corresponding to the size of a single zone defined in a DVD-RAM specification for the writable storage area.

In the case of the conventional DVD-RAM, various control information, such as the rotation speed of a disc and defect management information, are closely related to the size and the location of a zone. In particular, the rotation speed of the DVD-RAM is not only connected with a zone but also closely related to the recording characteristics of such a phase-change recording medium. Accordingly, to be compatible with the physical recording characteristics of the conventional DVD-RAM, it is preferable to consider size and location in the assignment of zones when the read-only storage area and the writable storage area are defined on the hybrid disc of the present invention.

In addition, the conventional DVD-ROM specification defines a dual layer disc. Accordingly, it is preferable to dispose the read-only storage area 44 defined by the dual layer DVD-ROM specification in an inner part of the hybrid disc 40 and the writable storage area of a single layer structure 50 in an outer part of the hybrid disc 40 beyond the read-only storage area 44 on the hybrid disc, as shown in FIG. 4.

Since the conventional specification for the writable storage area 50 defines only the single layer structure, it is preferable to dispose the writable storage area 50 on a first recording layer 46, LAYER 0, on a first substrate 52. This is because a heat transfer characteristic changes, and this may result in a change in a recording characteristic in a writable medium including a recording layer having a multi-layer structure when the order of a substrate on which the recording layer is formed and a plurality of layers included in the recording layer, changes in view of an incident laser beam.

The structure of the hybrid disc 40 shown in FIG. 4 defines a dual layer read-only storage area 44, thereby realizing a capacity of 4.7 Gbytes, which is the size of the most widely used DVD-ROM, by applying the dual layer read-only storage area 44, while including the writable storage area 50.

FIG. 5 illustrates a second embodiment of the optical recording medium according to the present invention wherein a hybrid disc 60 is shown. A first substrate 62 has a transparent area 66 without having any storage area at its inner part and the writable storage area 50 at the outer circumference thereof. Meanwhile, the second substrate 54 has the recording layer 48, LAYER 1, in a read-only storage area 64 at its inner part, which is spatially separated from the writable storage area 50 of the first substrate 62.

The two optical recording media, i.e., the second substrate 54 having the read-only storage area 64, and the first substrate 62 having the writable storage area 50, are combined with each other, thereby forming an optical recording medium 60 having both the read-only storage area 64 and the writable storage area 50. As for the present embodiment of the optical recording medium, a writable medium manufacturing process and a read only medium manufacturing process can be applied separately, and different stampers (not shown) can be

used in manufacturing the second substrate 64 having the read-only storage area 64 and the first substrate 62 having the writable storage area 50. For this reason, even if the content of data to be written onto the read-only storage area 64 is changed, there is no need to change the stamper for the writable medium (the first substrate 62). On the other hand, an advantage in view of the read only medium, is that it is unnecessary to form a recording layer.

Also, the hybrid disc 60 as shown in the second embodiment in FIG. 5 enables a read only disc manufacturer to produce a recording medium having a writable storage area and a read-only storage area by simply combining a medium having a writable storage area, which is commercially available, with a medium having a read-only storage area produced by the manufacturer.

FIG. 6 illustrates a third embodiment of the optical recording medium according to the present invention, wherein a hybrid disc 70 is shown. The hybrid disc 70 has a single read-only storage area 74 at its inner part and a writable storage area 50 at its outer part. Thus, the hybrid disc 70 having the read-only storage area 74 and the writable storage area 50, which have different features, can be implemented with a single substrate, which is a first substrate 52.

To avoid the read-only storage area 74 from being exposed during the formation of a recording layer 76 in a writable storage area 60, the read-only storage area 74 is covered with a mask (not shown) during formation of the recording layer 76 in the writable storage area 50, and the mask is removed before formation of an outermost reflective layer (not shown) of the hybrid disc 70, so that the hybrid disc 70 can be constructed. A second substrate 84 has a dummy recording layer 58 in both the read-only storage area 74 and the writable storage area 50, so that no data is recorded on the entire dummy recording layer 58. The hybrid disc having both a read-only storage area and a writable storage area 50 can be produced through such successive processes using a single stamper.

FIG. 7 illustrates a fourth embodiment of the optical recording medium according to the present invention, showing a hybrid disc 90, in which a dual layered read-only storage area 92 is formed at the inner part of each of the first and second substrates 102 and 104 by a two

photo polymerization (2P) technique, and a writable storage area 100 adopting a DVD-RAM format and having the recording/reproducing characteristics defined by a DVD-RAM format, is formed at the outer part of each of the first and second substrates 102 and 104. For this case, writing or reading data onto or from the first and second recording layers 106 and 108, LAYER 0 and LAYER 1, formed at the first substrate 102 is performed through an incident side of entrance on the hybrid disc 90 of a laser beam of the first substrate 102. Also, writing or reading data onto or from the first and second recording layers 106 and 108, LAYER 0 and LAYER 1, formed at the second substrate 104 is performed through an incident side of entrance on the hybrid disc 90 of a laser beam of the second substrate 104. In the hybrid disc 90 having such a structure, formation of the recording layer at a portion of the storage area may be omitted. For example, the first substrate 102 may have a single layered read-only storage area or the second substrate may have no writable storage area.

FIG. 8 illustrates a fifth embodiment of the optical recording medium according to the present invention, wherein a hybrid disc 110 is shown. The structure of the hybrid disc 110 is the same as that shown in FIG. 4, except that the writable storage area 120 is formed with a dual layered structure (the writable storage area 120 of the first and second recording layers 46 and 48), and is arranged at the outer part of each of the first and second substrates 52 and 114. As shown in FIG. 8, writing and reading operations are performed through the incident side of the first substrate 52. For this case, recording/reproducing characteristics in the dual layered structure are different from those of the writable storage area having a single layered structure, so that the structure of a recording/reproducing apparatus for the optical recording medium may be complicated. Meanwhile, such a dual layered structure is advantageous due to an increased data writing capacity in the writable area.

FIG. 9 illustrates a sixth embodiment of the optical recording medium according to the present invention showing a hybrid disc 130, in which a read-only storage area 134 is formed over a first substrate 142, and a writable storage area 150 is formed over a second substrate 144. The read-only storage area is formed of a first recording layer 146, LAYER 0, and the writable storage area is formed of a second recording layer 148. This configuration may lower

the compatibility in reading operations with other recording media. In addition, the recording characteristics are changed and thus the compatibility in writing operations with other recording media may be lowered. Advantages of the hybrid disc 130 shown in FIG. 10 are that a writable medium and a read only medium can be separately manufactured, as described previously, and data writing capacity increases.

In the case where the writable storage area 150 is formed at the second substrate 144 and the read-only storage area 134 is formed at the first substrate 142, the hybrid disc 130 can be constructed to enable reading or writing of data from or to two recording layers through the incident side of the first substrate 142, rather than one side of the hybrid disc 130 for one layer and the other side of the hybrid disc 130 for the other layer.

On the other hand, when the writable storage area 150 is formed at the first substrate 142, the second recording layer 148 must be formed of a semi-transmissive layer, and data from the read-only storage area 134 formed at the second substrate 144 must be reproduced with a higher read power so as to compensate for reduced read laser power due to the first recording layer 146 of the first substrate 142. For this case, it is very likely that data of the first recording layer 146 will be erased or changed by interference. The configuration shown in FIG. 9 contributes to minimizing such a problem with an increased writable storage area.

FIG. 10 illustrates the control information for correct playback from the optical recording medium according to the first through fifth embodiments of the present invention by a recording/reproducing apparatus.

As for a hybrid disc medium having a read-only storage area and a writable storage area, as previously mentioned, the read-only storage area is constructed to have compatibility with a conventional DVD-ROM reproducing apparatus. For this case, there is no problem in using a conventional DVD reproducing apparatus. However, a disc identifier for use in distinguishing a hybrid disc from a conventional DVD-ROM is required to enable an apparatus for recording/reproducing data onto/from the writable storage area to identify the hybrid disc. The need for such identification information may be satisfied by adding particular information to the lead-in area.

To implement the compatibility with a DVD reproducing apparatus which is able to recognize only a conventional DVD-ROM, it is preferable that data writing is performed with reserved bytes, without using the physical format information of the control data zone. This is because modifying the physical format information, for example, the BP0, of the existing control data zone including book type information indicating the type of specification book, and part version information of the specification book, to be suitable for a new medium, may result in losing compatibility.

In particular, DVD-ROMs do not utilize the 17th through 32nd bytes of the physical format information, and thus hybrid disc identification information indicating a hybrid disc having a read-only storage area and a writable storage area can be written using some reserved bytes for other writing formats. As shown in FIG. 11, such hybrid disc identification information includes information on the presence or absence of the writable storage area, which is an indicator of the hybrid disc, and on part version for the hybrid disc.

Comparing the lead-in information of a DVD-ROM with the lead-in information of a DVD-RAM that is a writable medium, the lead-in information of the writable medium contains all fields of the lead-in information of the DVD-ROM. On the other hand, the lead-in information of the DVD-ROM uses only 16 bytes and the remaining bytes are reserved.

As for the writable medium, a plurality of information areas are allocated to the lead-in information for adding information on, for example, the recording characteristics of the medium. Also, the recording density belonging to the lead-in information of the DVD-RAM is constructed to be different from that of a DVD-ROM disc.

As shown in FIG. 10, when reproduction is carried out from the lead-in area of the read-only storage area, the data area of the read-only storage area, the lead-out area of the read-only storage area, and the lead-in area of the writable storage area consecutively, the data transmission rate and the rotation speed of a spindle motor are varied, thereby slowing down a data recording/reproducing speed. To solve this problem, it is preferable for the hybrid disc to store the physical format information of the control data zone for the writable storage area in the lead-in area of the read-only storage area.

For this case, the reserved bytes among 2048 bytes allocated for the physical format information of the read-only storage area, i.e., the bytes after the 1024th byte, are used to store the physical format information for the writable storage area, and thus the storage of corresponding information in the lead-in area of a writable medium can be omitted. As a result, a delay in writing and reading operations due to the difference in transmission rate and rotation speed of a spindle motor can be avoided.

FIG. 10 shows that the control data zone of the lead-in area of the read-only storage area includes physical format information, disc manufacturer information and reserved bytes. The physical format information comprises bytes BP0 to BP2047. BP0 includes the book type (DVD-ROM disc, DVD-RAM disc) and part version. In the present invention, the book type will be "DVD-ROM" so as to be readable by a conventional DVD-ROM player. BP0 to BP16 includes physical format information for a DVD-ROM, or in this instance, the read-only storage area. BP17 to BP18 includes the hybrid disc identification information as shown in FIG. 11. BP19 to BP1023 are reserved bytes. BP1024 to BP2047 are physical format information for a DVD-RAM, or in this instance, the writable storage area.

As shown in FIG. 12A, a DVD-RAM, which has a writable format, has the same information structure of an embossed data zone having pits in the lead-in area as that of a DVD-ROM shown in FIG. 12B. In other words, a reference code, a buffer zone, an initial zone and the like are the same in terms of size and data value between the two information structures. The only difference between the two information structures lies in that a portion of information of the control data zone is different. This minor difference means that the two lead-in areas can be integrated with the identical information.

If the information of the two lead-in areas is integrated into the lead-in information for the read-only storage region, it is sufficient for the lead-in area of the writable storage area to only include a connection zone for connecting the read-only storage area and the writable storage area, defect management zones DMA 1 and DMA 2, and a drive test zone.

The rewritable lead-in area is located in the writable storage area, and the connection zone is a mirror zone formed of a reflective layer without including any information, which is

effective in minimizing the unnecessary space between the read-only storage area and the writable storage area.

FIG. 13 is a block diagram of an apparatus for recording/reproducing information onto/from the optical recording medium according to the embodiments of the present invention.

For a writing operation, an AV CODEC and/or host interface 210 compresses an A/V signal from the outside according to a predetermined compression scheme, and outputs information on the size of the compressed A/V data. A digital signal processor (DSP) 220 receives the compressed A/V data from the AV CODEC and/or host interface 210, adds additional information to the received compressed A/V data for error correction coding (ECC), and modulates the data according to a predetermined modulation scheme. A radio frequency amplifier (RF AMP) 230 converts the data modulated by the DSP 220 into an RF signal. A pickup unit 240 writes the RF signal from the RF AMP 230 onto the writable storage area of a disc (any of the hybrid discs 40, 60, 70, 90, 110 and 130 disclosed herein) mounted on a turn table. A servo unit 250 receives information required for servo control from a system controller 260, and stably servo controls the disc.

The system controller 260 generates identification information for indicating a hybrid disc having a read-only storage area and a writable storage area, and controls the apparatus to write the identification information onto the lead-in area of the read-only storage area through the DSP 220 and the RF AMP 230.

On the other hand, for a reading operation, the pickup unit 240 picks up the data, which is in the form of an optical signal, from a hybrid disc having a read-only storage area and a writable storage area, and outputs an electrical signal. The RF AMP 230 extracts a servo signal for use in servo controlling and the modulated data. The DSP 220 demodulates the modulated data from the RF AMP 230 based on the modulation scheme used for the previous modulation, corrects errors through ECC, and removes the data added for the ECC. The servo unit 250 receives information required for servo controlling from the RF AMP 130 and the system controller 260, and performs servo controlling. The AV CODEC and/or host

interface 210 decompresses the compressed A/V data from the DSP 220 to output the original A/V signal. The system controller 260 controls the entire system for reading and writing information data from and to the hybrid disc seated on the turn table by user interfacing.

A problem of hybrid discs having a read-only storage area in a DVD-ROM format and a writable storage area in a DVD-RAM format is that a reference linear velocity is different for each area. Especially, a change in reference linear velocity for the writable storage area varies the recording characteristics, and thus data cannot be recorded on the area. On the other hand, as can be seen from an existing multiple speed reproducing system for DVD-ROMs, data can be reproduced from the read-only storage area at variable reproduction speeds, without causing any serious problem.

In the apparatus for alternately and repeatedly reproducing or recording data from or onto the read-only storage area and the writable storage area, respectively, it is preferable that the servo unit 250 reproduces the data from the read-only storage area at the same reference velocity as the reference linear velocity for recording and reproducing the data at the innermost part of the writable storage area.

As previously described, the present invention provides an optical recording medium having composite recording/reproducing characteristics, in which both a read-only storage area in the existing DVD-ROM format, and a writable storage area having the recording/reproducing characteristics defined by a DVD-RAM format are present on an optical recording medium such as a hybrid disc. In the hybrid disc according to the embodiments of the present invention, data correction, modification and addition of data stored in the read-only storage area is possible, using the writable storage area. In addition, the hybrid disc can be efficiently manufactured by various methods according to the present invention.

Although a few preferred embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

CLAIMS

What is claimed is:

1. An optical recording medium comprising:
 - a read-only storage area;
 - a writable storage area;
 - a read-only lead-in area having first control information for both the read-only and writable storage areas; and
 - a writable lead-in area having second control information relating to the writable storage area.
2. The optical recording medium according to claim 1, wherein:
 - the read-only storage area comprises
 - the read-only lead-in area,
 - a read-only memory (ROM) data area, and
 - a read-only lead-out area; and
 - the writable storage area comprises
 - the writable lead-in area which comprises a connection zone to connect the read-only storage area and the writable storage area,
 - a random access memory (RAM) data area, and
 - a read-only lead-out area.
3. The optical recording medium according to claim 2, wherein the read-only lead-in area comprises hybrid identification information indicating that the optical recording medium is a hybrid disc having the read-only storage area and the writable storage area.

1 4. The optical recording medium according to claim 3, wherein the hybrid
2 identification information comprises information indicating a presence or absence of the
3 writable storage area, and information on a part version of the hybrid disc.

1 5. The optical recording medium according to claim 1, wherein the read-only lead-
2 in area comprises hybrid identification information indicating that the optical recording
3 medium is a hybrid disc having the read-only storage area and the writable storage area.

1 6. The optical recording medium according to claim 2, wherein the hybrid
2 identification information comprises information indicating a presence or absence of the
3 writable storage area, and information on a part version of the hybrid disc.

1 7. The optical recording medium according to claim 1, wherein:
2 the writable storage area comprises a control data zone; and
3 the read-only lead-in area comprises first physical format information of the read-only
4 storage area and second physical format information of the control data zone.

1 8. The optical recording medium according to claim 7, wherein the first physical
2 format information comprises reserved bytes which stores the second physical format
3 information.

1 9. The optical recording medium according to claim 2, wherein:
2 the writable storage area comprises a control data zone; and
3 the read-only lead-in area comprises physical format information of the read-only
4 storage area and physical format information of the control data zone.

1 10. The optical recording medium according to claim 7, wherein the first physical
2 format information comprises reserved bytes which stores the second physical format
3 information.

1 11. The optical recording medium according to claim 1, wherein the read-only
2 storage area and the read-only lead-in area are compatible with a read-only memory (ROM)
3 specification.

1 12. The optical recording medium according to claim 11, wherein the ROM
2 specification is a digital versatile disc (DVD)-ROM specification and the writable storage area
3 and the writable lead-in area are compatible with a DVD-RAM specification.

1 13. The optical recording medium according to claim 1, wherein a minimum size of
2 the writable storage area is at least as great as a size of a single zone defined by a digital
3 versatile disc random access memory (DVD-RAM) specification.

1 14. The optical recording medium according to claim 1, wherein:
2 the read-only storage area has a start position at a diameter of approximately 48mm,
3 and an ending position at a diameter greater than the approximately 48mm and less than
4 approximately 116mm if the optical recording medium has a diameter of approximately
5 120mm, and has the start position at a diameter of approximately 48mm, and an ending
6 position at a diameter greater than the approximately 48mm and less than approximately 76mm
7 if the optical recording medium has a diameter of approximately 80mm; and
8 the writable storage medium is arranged in a remaining area of the optical recording
9 medium which does not contain read-only data.

1 15. The optical recording medium according to claim 1, wherein the read-only lead-
2 in area comprises:
3 a control data zone which stores the first control information.

1 16. The optical recording medium according to claim 15, wherein the first control
2 information comprises:
3 physical format information for the read-only storage area;
4 hybrid disc identification information indicating that the optical recording medium is a
5 hybrid disc having the read-only storage area and the writable storage area; and
6 physical format information for the writable storage area.

1 17. The optical recording medium according to claim 16, wherein the physical
2 format information for the writable storage area is stored in bytes 1024 through 2047 of the
3 first control information.

1 18. The optical recording medium according to claim 17, wherein the physical
2 format information for the read-only storage area is stored in bytes 0 through 16 of the first
3 control information and the hybrid disc identification information is stored in bytes 17 and 18
4 of the first control information.

1 19. The optical recording medium according to claim 16, wherein the physical
2 format information for the read-only storage area comprises:
3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and
5 a part version indicating a version number of the optical recording medium.

1 20. The optical recording medium according to claim 18, wherein the physical
2 format information for the read-only storage area comprises:
3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and
5 a part version information indicating a version number of the optical recording medium;
6 wherein the book type information and part version information are stored in byte 0 of
7 the first control information.

1 21. The optical recording medium according to claim 16, wherein the hybrid disc
2 information comprises part version information indicating a version number of the hybrid disc.

1 22. The optical recording medium according to claim 20, wherein the hybrid disc
2 information comprises:
3 existence information indicating that the optical recording medium is a hybrid disc
4 having the read-only storage area and the writable storage area; and
5 part version information indicating a version number of the hybrid disc,
6 wherein the existence information and the part version information are stored in bytes
7 17 and 18 of the physical format information.

1 23. The optical recording medium according to claim 1, wherein the second control
2 information comprises:
3 a connection zone which connects the read-only storage area and the writable storage
4 area;
5 at least one defect management zone; and
6 a drive test zone.

1 24. The optical recording medium according to claim 16, wherein the second
2 control information comprises:
3 a connection zone which connects the read-only storage area and the writable storage
4 area;
5 at least one defect management zone; and
6 a drive test zone.

1 25. An optical recording medium comprising:
2 a dual layered read-only storage area at an inner part of the optical recording medium;
3 and
4 a single layered writable storage area at an outer part of the optical recording medium.

1 26. The optical recording medium according to claim 25, wherein the optical
2 recording medium further comprises:
3 a first substrate having a first layer of the dual layered read-only storage area at an
4 inner part of the first substrate and the single layered writable storage area at an outer part of
5 the first substrate; and
6 a second substrate attached to the first substrate, having a second layer of the dual
7 layered read-only storage area at an inner part of the second substrate.

1 27. The optical recording medium according to claim 26, wherein:
2 the dual layered read-only storage area includes a lead-in area having first control
3 information for both the dual layered read-only and single layered writable storage areas; and
4 the single layered writable storage area has a lead-in area having second control
5 information relating to the single layered writable storage area.

1 28. An optical recording medium comprising:
2 a first substrate having a transparent region at an inner part of the first substrate and a
3 writable storage area at an outer part of the first substrate;
4 a second substrate attached to the first substrate, having a read-only storage area at an
5 inner part of the second substrate; and
6 wherein light beams to read from the read-only storage area and write to the writable
7 storage area are to be incident on the first substrate before being incident on the second
8 substrate.

1 29. The optical recording medium according to claim 28, wherein:
2 the read-only storage area includes a lead-in area having first control information for
3 both the read-only and writable storage areas; and
4 the writable storage area has a lead-in area having second control information relating
5 to the writable storage area.

1 30. An optical recording medium comprising:
2 a first substrate having a read-only storage area at an inner part of the first substrate
3 and a writable storage area at an outer part of the first substrate;
4 a second substrate attached to the first substrate, having transparent regions at the inner
5 and outer parts of the second substrate.

1 31. The optical recording medium according to claim 30, wherein:
2 the read-only storage area includes a lead-in area having first control information for
3 both the read-only and writable storage areas; and
4 the writable storage area has a lead-in area having second control information relating
5 to the writable storage area.

1 32. An optical recording medium comprising:
2 a dual layered read-only storage area at an inner part of the optical recording medium;
3 and
4 a dual layered writable storage area at an outer part of the optical recording medium.

1 33. The optical recording medium according to claim 32, wherein the optical
2 recording medium further comprises:
3 a first substrate having a first layer of the dual layered read-only storage area at an
4 inner part of the first substrate and a first layer of the dual layered writable storage area at an
5 outer part of the first substrate; and
6 a second substrate attached to the first substrate, having a second layer of the dual
7 layered read-only storage area at an inner part of the second substrate and a second layer of the
8 dual layered writable storage area at an outer part of the second substrate.

1 34. The optical recording medium according to claim 33, wherein:
2 the dual layered read-only storage area includes a lead-in area having first control
3 information for both the dual layered read-only and dual layered writable storage areas; and
4 the dual layered writable storage area has a lead-in area having second control
5 information relating to the dual layered writable storage area.

1 35. An optical recording medium comprising:
2 a read-only storage area extending from an inner part to an outer part of the optical
3 recording medium; and
4 a writable storage area extending from an inner part to an outer part of the optical
5 recording medium.

1 36. The optical recording medium according to claim 35, wherein the optical
2 recording medium further comprises:
3 a first substrate having the read-only storage area extending from an inner part to an
4 outer part of the first substrate; and
5 a second substrate attached to the first substrate, having a transparent region extending
6 from an inner part to an outer part of the second substrate.

1 37. The optical recording medium according to claim 36, wherein:
2 the read-only storage area includes a lead-in area having first control information for
3 both the read-only and writable storage areas; and
4 the writable storage area has a lead-in area having second control information relating
5 to the writable storage area.

1 38. An dual sided optical recording medium comprising:
2 first and second dual layered read-only storage areas at an inner part of the optical
3 recording medium; and
4 first and second single layered writable storage areas at an outer part of the optical
5 recording medium.

1 39. The dual sided optical recording medium according to claim 38, wherein the
2 optical recording medium further comprises:
3 a first substrate having the first dual layered read-only storage area at an inner part of
4 the first substrate and the first single layered writable storage area at an outer part of the first
5 substrate; and
6 a second substrate attached to the first substrate, having the second dual layered read-
7 only storage area at an inner part of the second substrate and the second single layered writable
8 storage area at an outer part of the second substrate.

1 40. The dual sided optical recording medium according to claim 39, wherein:
2 the first dual layered read-only storage area includes a lead-in area having first control
3 information for both the first dual layered read-only and first single layered writable storage
4 areas;
5 the second dual layered read-only storage area includes a lead-in area having first
6 control information for both the second dual layered read-only and second single layered
7 writable storage areas;
8 the first single layered writable storage area has a lead-in area having second control
9 information relating to the first single layered writable storage area; and
10 the second single layered writable storage area has a lead-in area having second control
11 information relating to the second single layered writable storage area.

1 41. A digital versatile disc (DVD) comprising:
2 a read-only storage area having a lead-in area and a data area;
3 a writable storage area having a lead-in area and a data area;
4 wherein the lead-in area of read-only storage area comprises physical format
5 information for the read-only storage area and the writable storage.

1 42. The DVD according to claim 41, wherein the lead-in area of the read-only
2 storage area comprises hybrid disc information indicating whether the writable storage area
3 exists.

1 43. The DVD according to claim 41, wherein the lead-in area of the writable
2 storage area comprises physical format information for the writable storage area, including a
3 connection zone which connects the read-only storage area and the writable storage area, at
4 least one defect management zone, and a drive test zone.

1 44. The DVD according to claim 41, wherein the lead-in area of the writable
2 storage area comprises physical format information for the writable storage area, including a
3 connection zone which connects the read-only storage area and the writable storage area, at
4 least one defect management zone, and a drive test zone.

1 45. An apparatus for recording and reproducing data onto/from an optical recording
2 medium having a read-only storage area at an inner part of the optical recording medium and a
3 writable storage area at an outer part of the optical recording medium, the apparatus
4 comprising:

5 a system controller which generates identification information to indicate that the
6 optical recording medium is a hybrid disc having the read-only storage area and the writable
7 storage area; and

8 a recording and/or reproducing unit which records or reads data from the read-only
9 storage area and the writable storage area based on the generated identification information
10 which is stored in a lead-in area of the read-only storage area.

1 46. The apparatus according to claim 45, wherein:

2 the system controller generates first control information for both the read-only and
3 writable storage areas and second control information relating to the writable storage area; and

4 the recording and/or reproducing unit records the first control information in the lead-in
5 area of the read-only storage area and records the second control information in a lead-in area
6 of the writable storage area.

1 47. The apparatus according to claim 46, wherein the second control information
2 comprises:

3 a connection zone to connect the read-only storage area and the writable storage area;
4 a defect management zone to manage defects in the writable storage area; and
5 a drive test zone.

1 48. The apparatus according to claim 46, wherein the first control information
2 comprises:
3 physical format information of the read-only storage area; and
4 physical format information of a control data zone of the writable storage area.

1 49. The apparatus according to claim 48, wherein:
2 the second control information comprises:
3 a connection zone to connect the read-only storage area and the writable storage
4 area,
5 a defect management zone to manage defects in the writable storage area, and
6 a drive test zone; and
7 reproducing and/or reproducing unit reads the physical format information for
8 the read-only storage area and the writable storage area to reproduce data in the read-only
9 storage area and the writable storage areas, respectively, and reads the connection zone, defect
10 management zone and drive test zone to control the data in the writable storage area.

1 50. The apparatus according to claim 45, wherein the identification information
2 comprises information indicating a presence or absence of the writable storage area on the
3 hybrid disc, and information on a part version of the hybrid disc.

1 51. The apparatus according to claim 45, wherein the recording and/or reproducing
2 unit records the first control information using reserved bytes of physical format information
3 according to a digital versatile disc (DVD) specification.

1 52. The apparatus according to claim 45, wherein the
2 recording and/or reproducing unit controls a reference linear velocity for reproducing
3 the data in the read-only storage area to be the same as a reference linear velocity of data at an
4 innermost part of the writable storage area.

1 53. The apparatus according to claim 45, wherein the read-only lead-in area
2 comprises:
3 a control data zone which stores the first control information.

1 54. The apparatus according to claim 53, wherein the first control information
2 comprises:
3 physical format information for the read-only storage area;
4 hybrid disc identification information indicating that the optical recording medium is a
5 hybrid disc having the read-only storage area and the writable storage area; and
6 physical format information for the writable storage area.

1 55. The apparatus according to claim 54, wherein the physical format information
2 for the writable storage area is stored in bytes 1024 through 2047 of the first control
3 information.

1 56. The apparatus according to claim 55, wherein the physical format information
2 for the read-only storage area is stored in bytes 0 through 16 of the first control information
3 and the hybrid disc identification information is stored in bytes 17 and 18 of the first control
4 information.

1 57. The apparatus according to claim 56, wherein the physical format information
2 for the read-only storage area comprises:
3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and
5 a part version information indicating a version number of the optical recording medium;
6 wherein the book type information and part version information are stored in byte 0 of
7 the first control information.

1 58. The apparatus according to claim 54, wherein the physical format information
2 for the read-only storage area comprises:
3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and
5 a part version indicating a version number of the optical recording medium.

1 59. The apparatus according to claim 58, wherein the hybrid disc information
2 comprises:
3 existence information indicating that the optical recording medium is a hybrid disc
4 having the read-only storage area and the writable storage area; and
5 part version information indicating a version number of the hybrid disc,
6 wherein the existence information and the part version information are stored in bytes
7 17 and 18 of the physical format information.

1 60. The apparatus according to claim 54, wherein the hybrid disc information
2 comprises part version information indicating a version number of the hybrid disc.

1 61. The apparatus according to claim 54, wherein the second control information
2 comprises:
3 a connection zone which connects the read-only storage area and the writable storage
4 area;
5 at least one defect management zone; and
6 a drive test zone.

1 62. The apparatus according to claim 45, wherein the second control information
2 comprises:
3 a connection zone which connects the read-only storage area and the writable storage
4 area;
5 at least one defect management zone; and
6 a drive test zone.

1 63. The apparatus according to claim 45, wherein the optical recording medium has
2 first control information for both the read-only and writable storage areas in the lead-in area of
3 the read-only storage area and second control information relating to the writable storage area
4 in a lead-in area of the writable storage area, the recording and/or reproducing unit reading the
5 first and second control information so that the system controller causes the recording
6 and/or reproducing unit to read the data from the read-only and writable storage areas based
7 upon the first and second control information.

1 64. The apparatus according to claim 48, wherein the recording and/or reproducing
2 unit reads the first control information from reserved bytes of physical format information
3 according to a digital versatile disc (DVD) specification.

1 65. An apparatus for reproducing data from an optical recording medium having
2 read-only storage area at an inner part and a writable storage area at an outer part of the optical
3 recording medium, the apparatus comprising:

4 a reproducing unit which reproduces data from the read-only storage area and the
5 writable storage area; and

6 a system controller which controls a reference linear velocity of the reproducing unit
7 for reproduction of the data in the read-only storage area to be the same as a reference linear
8 velocity for reproduction of the data in an innermost part of the writable storage area.

1 66. A method of recording and reproducing data onto/from an optical recording
2 medium having a read-only storage area at an inner part of the optical recording medium and a
3 writable storage area at an outer part of the optical recording medium, the method comprising:

4 generating identification information to indicate that the optical recording medium is a
5 hybrid disc having the read-only storage area and the writable storage area; and

6 recording the generated identification information in a lead-in area of the read-only
7 storage area.

1 67. The method according to claim 66, further comprising:

2 generating first control information for both the read-only and writable storage areas
3 and second control information relating to the writable storage area; and

4 recording the first control information in the lead-in area of the read-only storage area
5 and recording the second control information in a lead-in area of the writable storage area.

1 68. The method according to claim 67, wherein the first control information
2 comprises:

3 physical format information of the read-only storage area; and

4 physical format information of a control data zone of the writable storage area.

1 69. The method according to claim 67, wherein the second control information
2 comprises:
3 a connection zone to connect the read-only storage area and the writable storage area;
4 a defect management zone to manage defects in the writable storage area; and
5 a drive test zone.

1 70. The method according to claim 67, wherein:
2 the second control information comprises:
3 a connection zone to connect the read-only storage area and the writable storage
4 area,
5 a defect management zone to manage defects in the writable storage area, and
6 a drive test zone; and
7 the method further comprising:
8 reading the physical format information for the read-only storage area and the
9 writable storage area to reproduce data in the read-only storage area and the writable storage
10 areas, respectively, and reading the connection zone, defect management zone and drive test
11 zone to control the data in the writable storage area.

1 71. The method according to claim 66, wherein the identification information
2 comprises information indicating a presence or absence of the writable storage area on the
3 hybrid disc, and information on a part version of the hybrid disc.

1 72. The method according to claim 66, wherein the recording of the first control
2 information comprises recording the first control information in reserved bytes of physical
3 format information according to a digital versatile disc (DVD) specification.

1 73. The method according to claim 66, further comprising:
2 controlling a reference linear velocity for reproducing data in the read-only storage area
3 to be the same as a reference linear velocity of data at an innermost part of the writable storage
4 area.

1 74. The method according to claim 66, wherein the read-only lead-in area
2 comprises:
3 a control data zone which stores the first control information.

1 75. The method according to claim 74, wherein the first control information
2 comprises:
3 physical format information for the read-only storage area;
4 hybrid disc identification information indicating that the optical recording medium is a
5 hybrid disc having the read-only storage area and the writable storage area; and
6 physical format information for the writable storage area.

1 76. The method according to claim 75, wherein the physical format information for
2 the writable storage area is stored in bytes 1024 through 2047 of the first control information.

1 77. The method according to claim 76, wherein the physical format information for
2 the read-only storage area is stored in bytes 0 through 16 of the first control information and
3 the hybrid disc identification information is stored in bytes 17 and 18 of the first control
4 information.

1 78. The method according to claim 75, wherein the physical format information for
2 the read-only storage area comprises:
3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and

5 a part version indicating a version number of the optical recording medium.

1 79. The method according to claim 77, wherein the physical format information for
2 the read-only storage area comprises:

3 book type information indicating that the optical recording medium is compatible with a
4 digital versatile disk read-only memory (DVD-ROM) specification; and

5 a part version information indicating a version number of the optical recording medium;
6 wherein the book type information and part version information are stored in byte 0 of
7 the first control information.

1 80. The method according to claim 75, wherein the hybrid disc information
2 comprises part version information indicating a version number of the hybrid disc.

1 81. The method according to claim 79, wherein the hybrid disc information
2 comprises:

3 existence information indicating that the optical recording medium is a hybrid disc
4 having the read-only storage area and the writable storage area; and

5 part version information indicating a version number of the hybrid disc,
6 wherein the existence information and the part version information are stored in bytes
7 17 and 18 of the physical format information.

1 82. The method according to claim 66, wherein the second control information
2 comprises:

3 a connection zone which connects the read-only storage area and the writable storage
4 area;

5 at least one defect management zone; and

6 a drive test zone.

1 83. The method according to claim 77, wherein the second control information
2 comprises:
3 a connection zone which connects the read-only storage area and the writable storage
4 area;
5 at least one defect management zone; and
6 a drive test zone.

1 84. A method of reproducing data from an optical recording medium having a read-
2 only storage area at an inner part of the optical recording medium, a writable storage area at an
3 outer part of the optical recording medium, and identification information stored in a lead-in
4 area of the read-only storage area to indicate that the optical recording medium is a hybrid disc
5 having the read-only storage area and the writable storage area, the method comprising:
6 reading the identification information from the lead-in area of the read-only storage
7 area;
8 reading data from the read-only and writable storage areas based upon the identification
9 information.

1 85. The method according to claim 84, wherein the optical recording medium has
2 first control information for both the read-only and writable storage areas in the lead-in area of
3 the read-only storage area and second control information relating to the writable storage area
4 in a lead-in area of the writable storage area, wherein:
5 the reading of the identification information comprises reading the first and second
6 control information; and
7 the reading of the data comprises reading the data from the read-only and writable
8 storage areas based upon the first and second control information.

1 86. The method according to claim 85, wherein the first control information
2 comprises:
3 physical format information of the read-only storage area; and
4 physical format information of a control data zone of the writable storage area.

1 87. The method according to claim 86, wherein the reading of the identification
2 information comprises reading the first control information from reserved bytes of physical
3 format information according to a digital versatile disc (DVD) specification.

1 88. The method according to claim 86, wherein:
2 the second control information comprises:
3 a connection zone to connect the read-only storage area and the writable storage
4 area,
5 a defect management zone to manage defects in the writable storage area, and
6 a drive test zone; and
7 the reading of the identification information comprises reading the physical format
8 information for the read-only storage area and the writable storage area to reproduce data in
9 the read-only storage area and the writable storage areas, respectively, and reading the
10 connection zone, defect management zone and drive test zone to control the data in the writable
11 storage area.

1 89. The method according to claim 84, wherein the identification information
2 comprises information indicating a presence or absence of the writable storage area on the
3 hybrid disc, and information on a part version of the hybrid disc.

1 90. The method according to claim 84, further comprising controlling a reference
2 linear velocity for reproducing data in the read-only storage area to be the same as a reference
3 linear velocity of data at an innermost part of the writable storage area.

1 91. The method according to claim 85, wherein the second control information
2 comprises:
3 a connection zone to connect the read-only storage area and the writable storage area;
4 a defect management zone to manage defects in the writable storage area; and
5 a drive test zone.

1 92. A method of reproducing data from an optical recording medium having read-
2 only storage area at an inner part and a writable storage area at an outer part of the optical
3 recording medium, the method comprising:
4 reproducing data from the read-only storage area and the writable storage area; and
5 controlling a reference linear velocity for reproduction of the data in the read-only
6 storage area to be the same as a reference linear velocity for recording or reproduction of the
7 data in an innermost part of the writable storage area.

1 93. A method of controlling a DVD-RAM area of an optical recording medium
2 having the DVD-RAM area in an inner part and a DVD-ROM area in an outer part of the
3 optical recording medium, wherein the DVD-RAM area includes a lead-in area having first
4 control information of physical format information for the DVD-ROM and DVD-RAM areas,
5 the method comprising:
6 reading the first control information from the lead-in area of the DVD-ROM area; and
7 controlling the data in the DVD-ROM area and the DVD-RAM based upon the read
8 first control information.

1 94. The method according to claim 93, wherein the DVD-RAM area has a lead-in
2 area having second control information with connection data for the DVD-ROM and DVD-
3 RAM areas and defect management information, the method further comprising:
4 reading the second control information from the lead-in area of the DVD-RAM area;
5 and
6 accessing the DVD-RAM area and managing defects in the DVD-RAM area based upon
7 the second control information.

ABSTRACT OF THE DISCLOSURE

An optical recording medium having a read-only storage area and a writable storage area and a recording/reproducing apparatus and method therefor. The optical recording medium is a hybrid disc having both the read-only storage area, which is suitable for mass production of information having the same contents, and the writable storage area on which data can be recorded, updated or added at a user's option. The read-only storage area has a structure that is completely compatible with a digital versatile disc read only memory (DVD-ROM) specification, and the writable storage area is compatible with the recording/reproducing characteristics of a writable DVD specification so that an existing reproducing-only apparatus can read information from the read-only storage area, and data can be recorded in the writable storage area using an apparatus obtained by minimally changing an existing recording/reproducing apparatus while maintaining the physical recording characteristics of the existing recording/reproducing apparatus.

FIG. 1 (PRIOR ART)

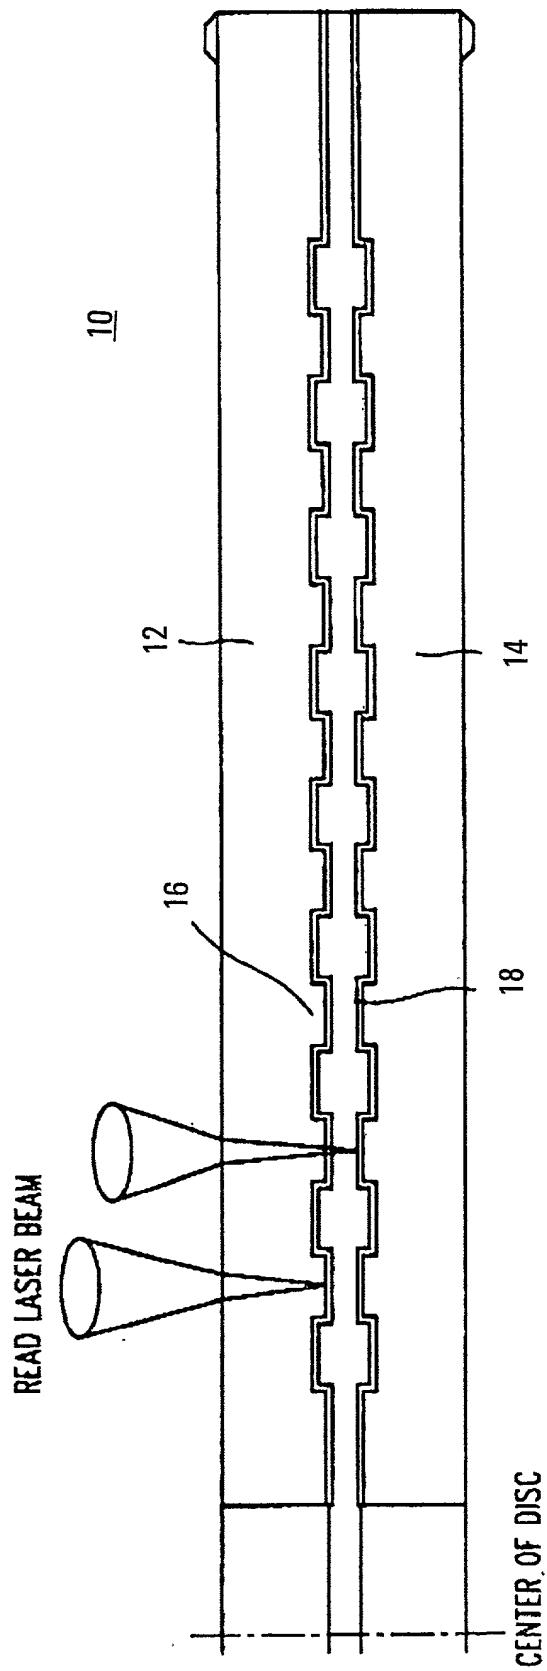


FIG. 2 (PRIOR ART)

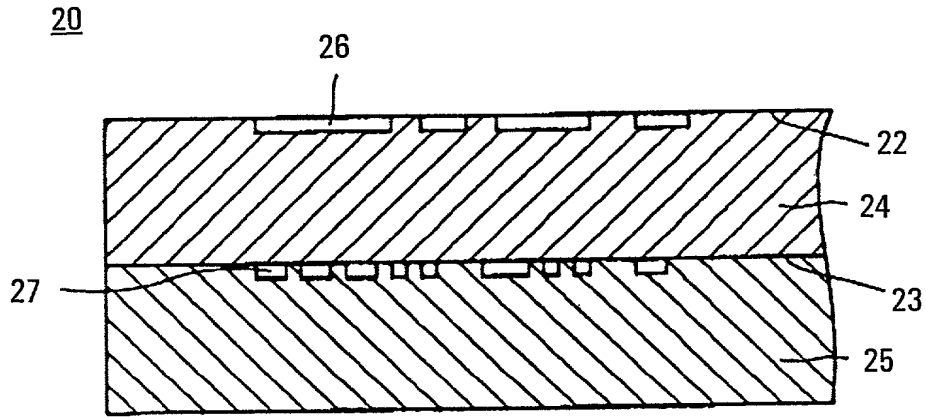
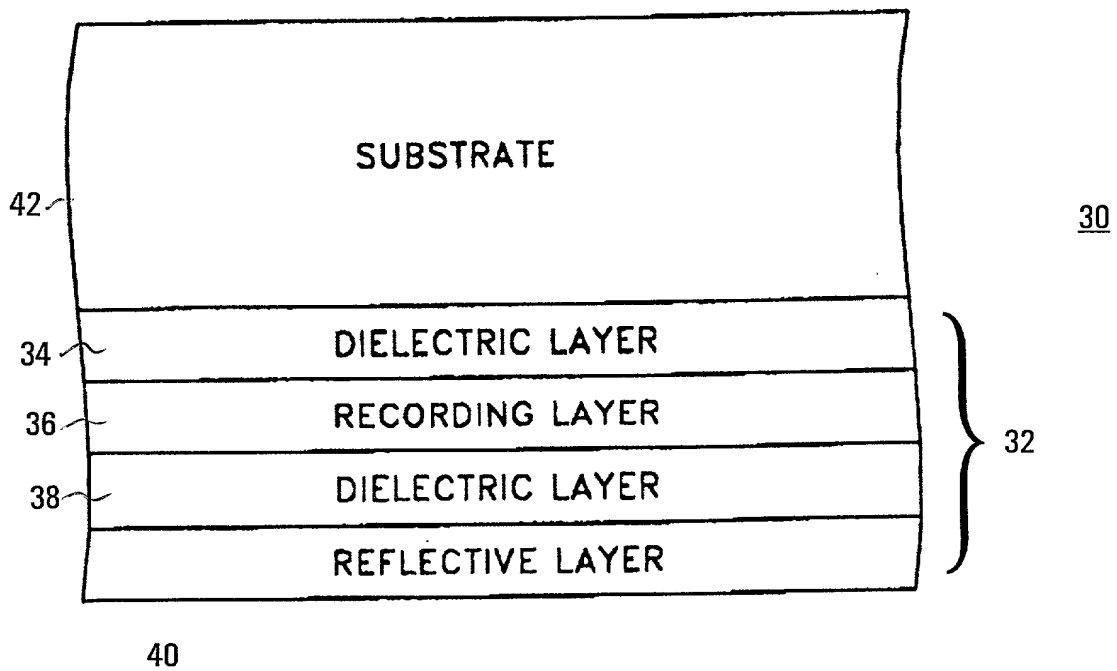


FIG. 3 (PRIOR ART)



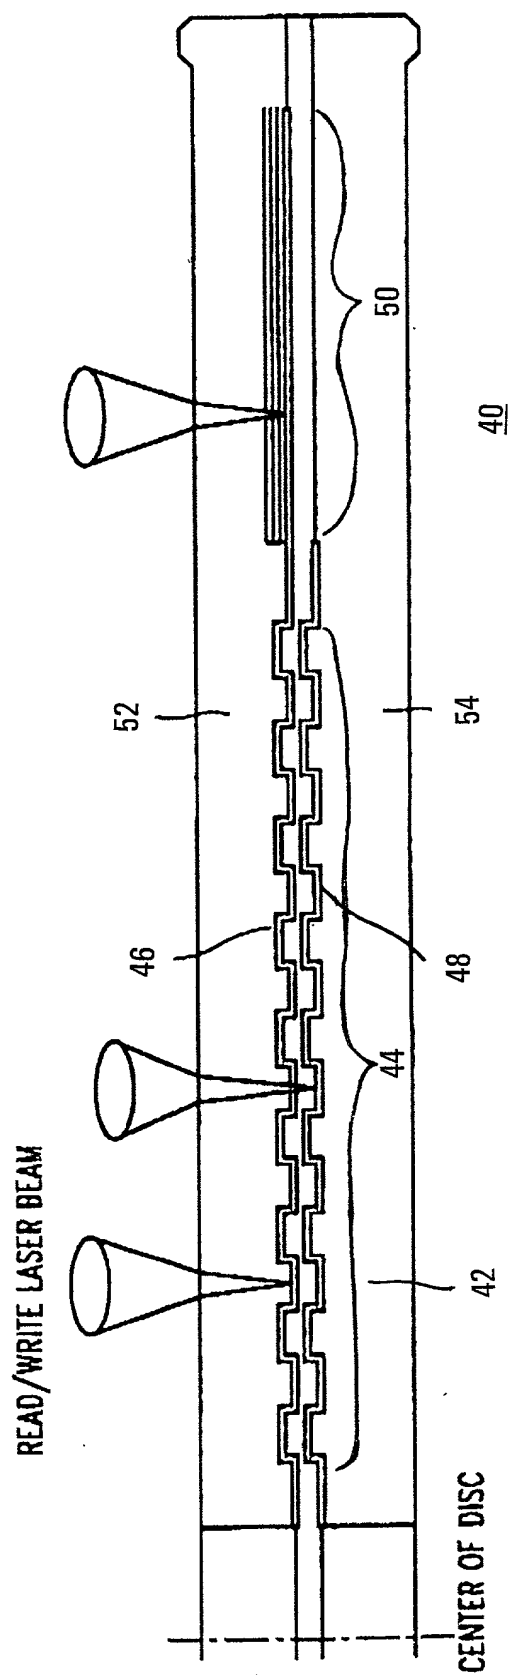
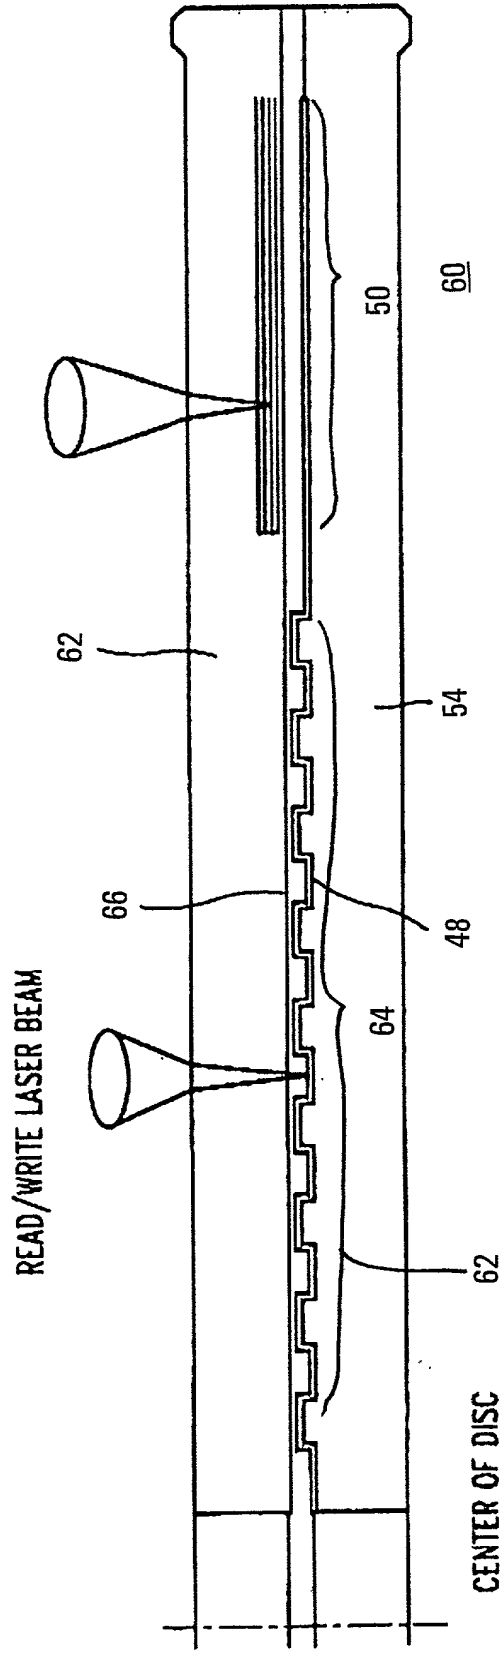


FIG. 5 is a cross-sectional view of the optical disk assembly of FIG. 1, taken along the line 5-5 of FIG. 1, showing the read/write laser beam 60 incident on the data layer 50.

FIG. 5



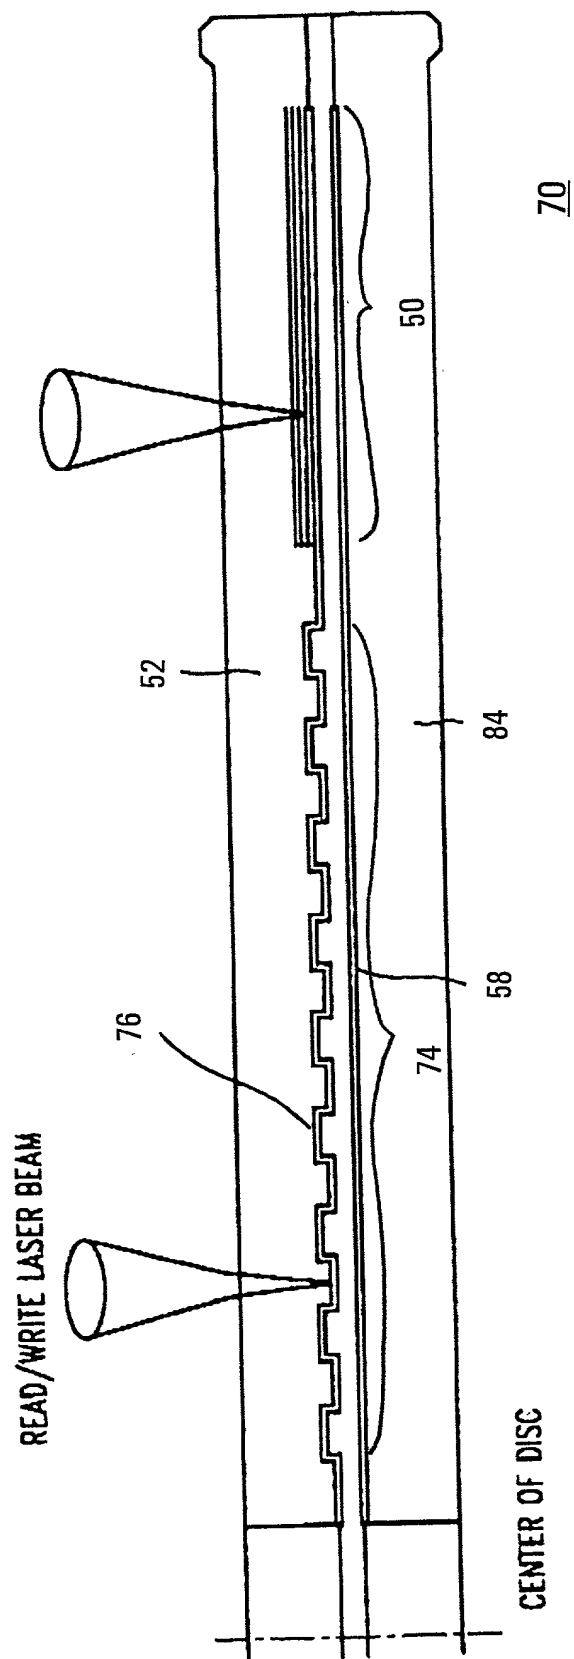


FIG. 6

FIG. 7

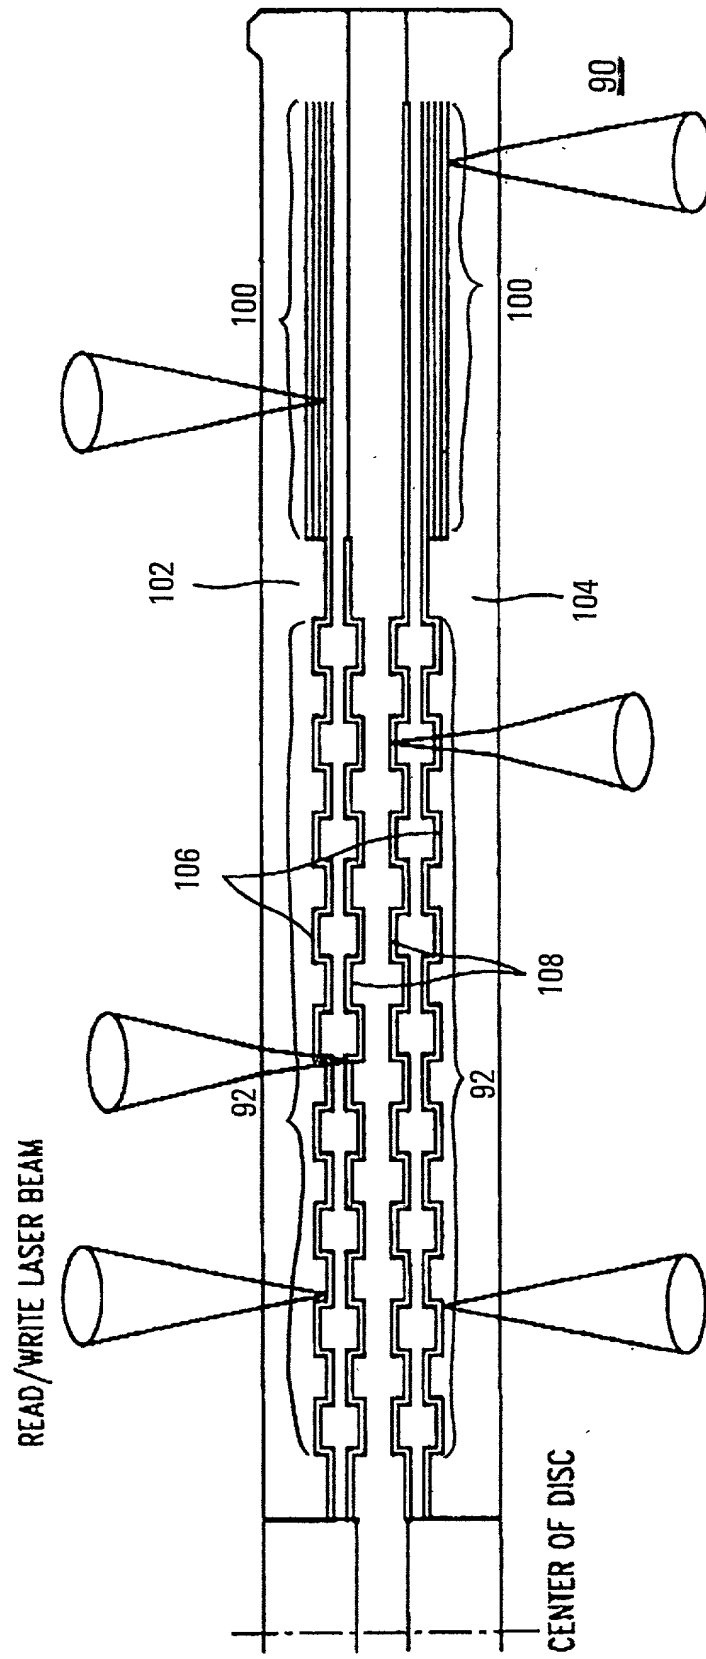


FIG. 8

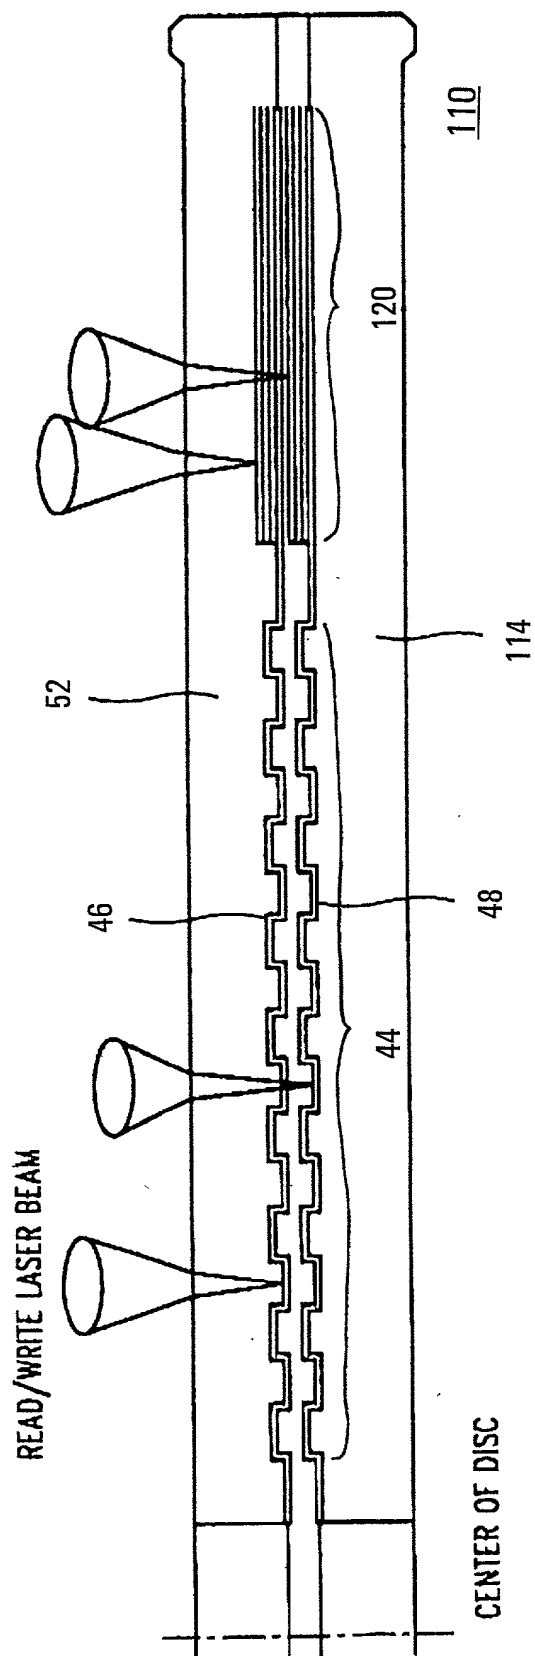


FIG. 9

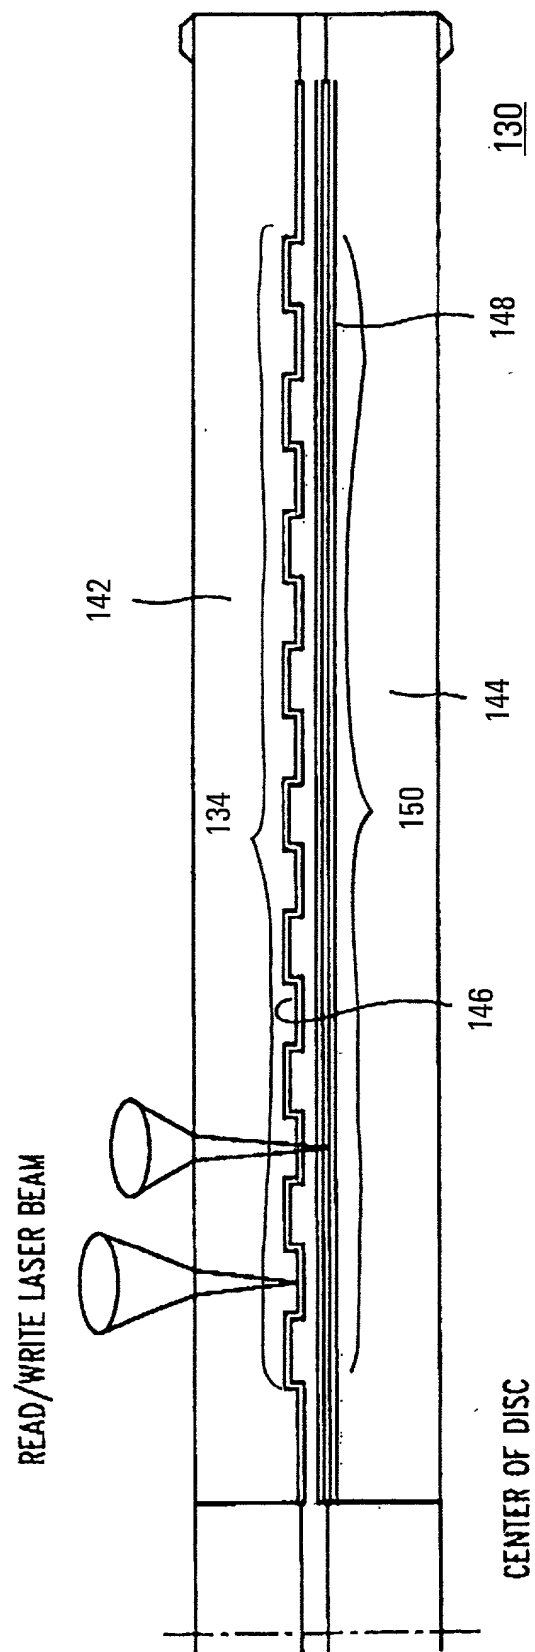


FIG. 10

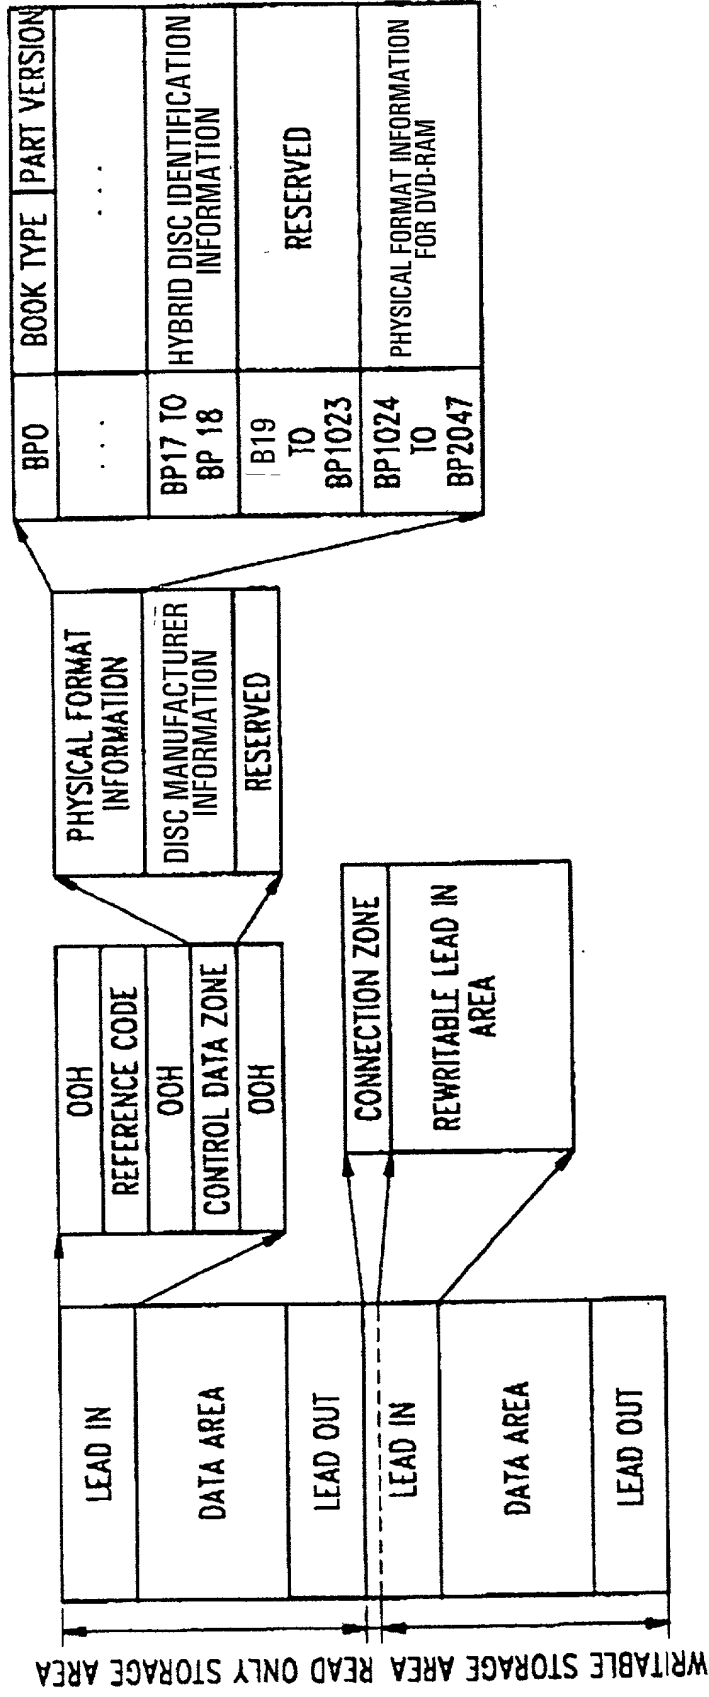


FIG. 11

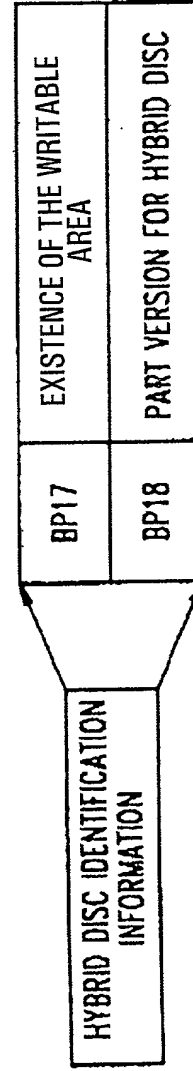


FIG. 12A

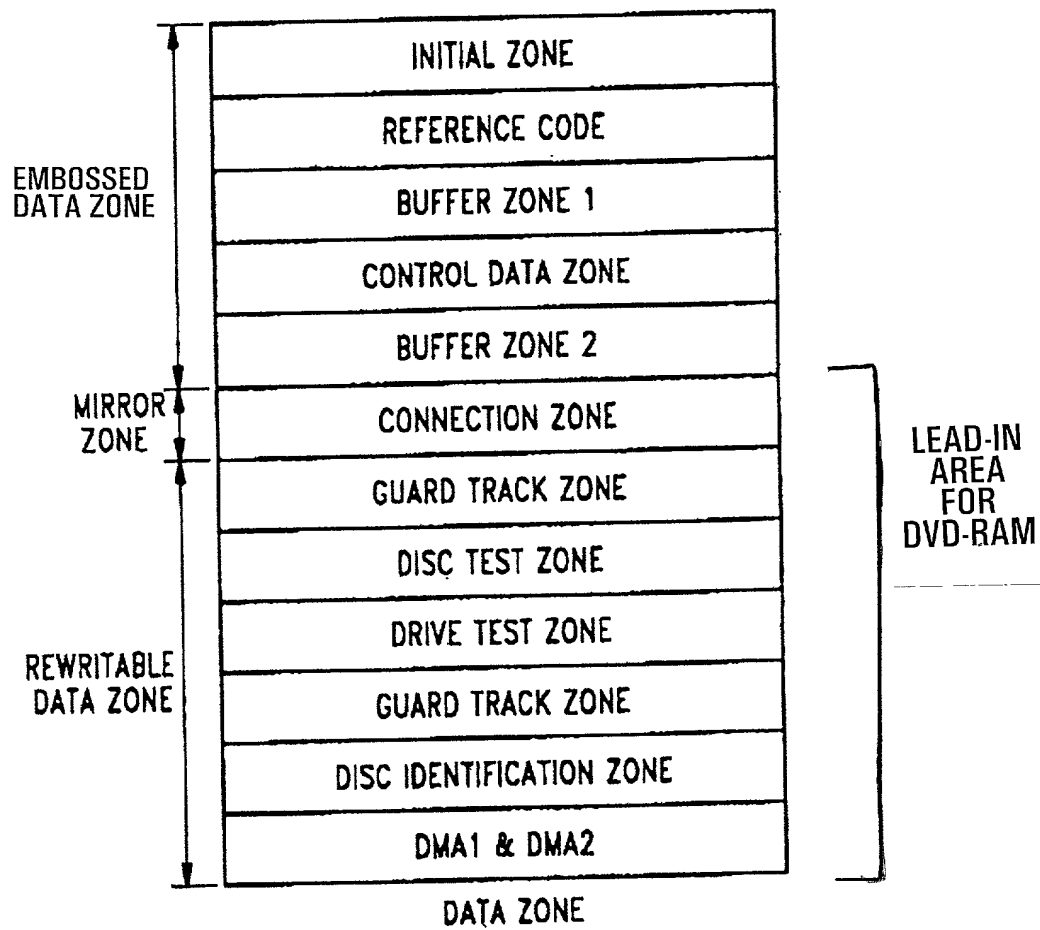


FIG. 12B

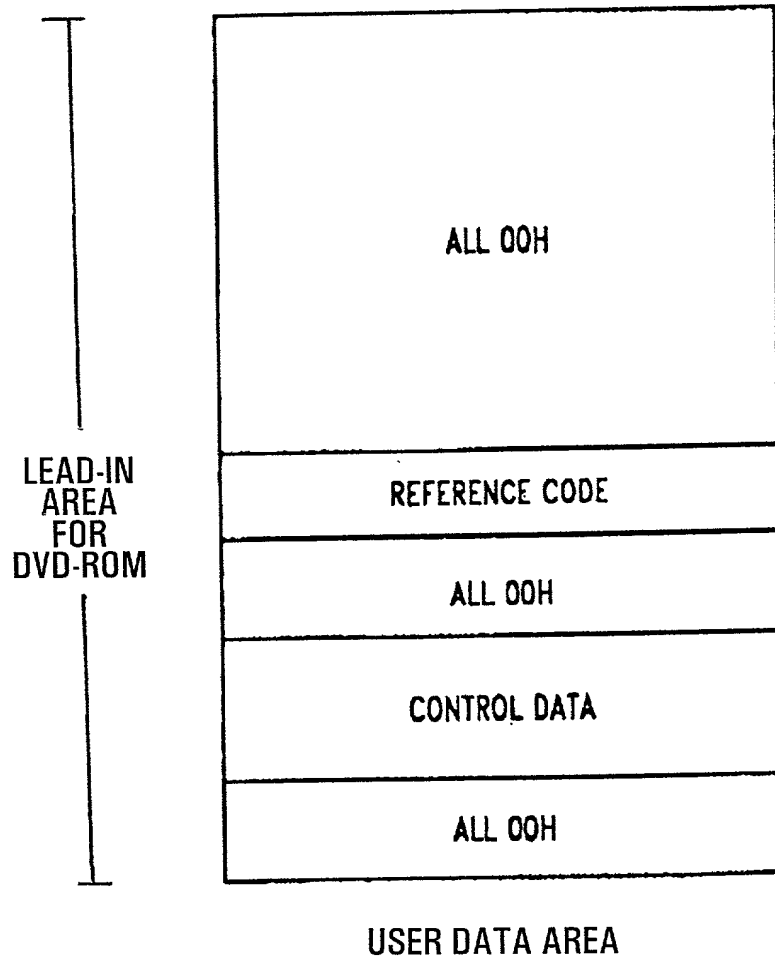


FIG. 13

